



**Weather Stop**  
**Side Seal**  
**Fitting**  
**Instructions**

# Fitting instructions

Suitable to fit with a manual or automatic up and over garage doors.

## Tools Required

- Tape measure
- Hacksaw or sharp scissors
- Pencil

**It is important to follow instructions carefully.  
(Must be fitted by a person over the age of 18)  
Work is undertaken at the purchaser's own risk.**

## Step One


With a tape measure, measure from the bottom of the frame up to the pivot point of the door.

## Step Two

Make a mark with a pencil on the frame on both sides, then cut the rubber side seal to size.

## Step Three

OUTSIDE

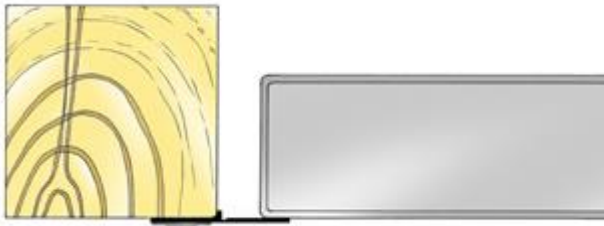

Put the washer over the screw and put screw through the rubber seal. Then fix the screw into the back edge of the frame. Continue this process until the side seal is secured tightly.

INSIDE

## Alternative Step

OUTSIDE



If the garage door also has a gap at the top side of the garage door the rubber seal may be fitted to the back of the garage door overlapping the frame. This can only be fitted from the pivot point of the door to the top of the door. In such circumstances, the rubber seal may have to be cut in sections to accommodate the garage door mechanism.

INSIDE